
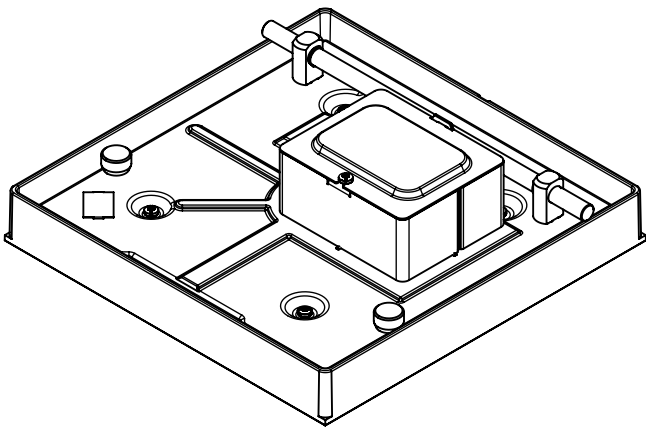
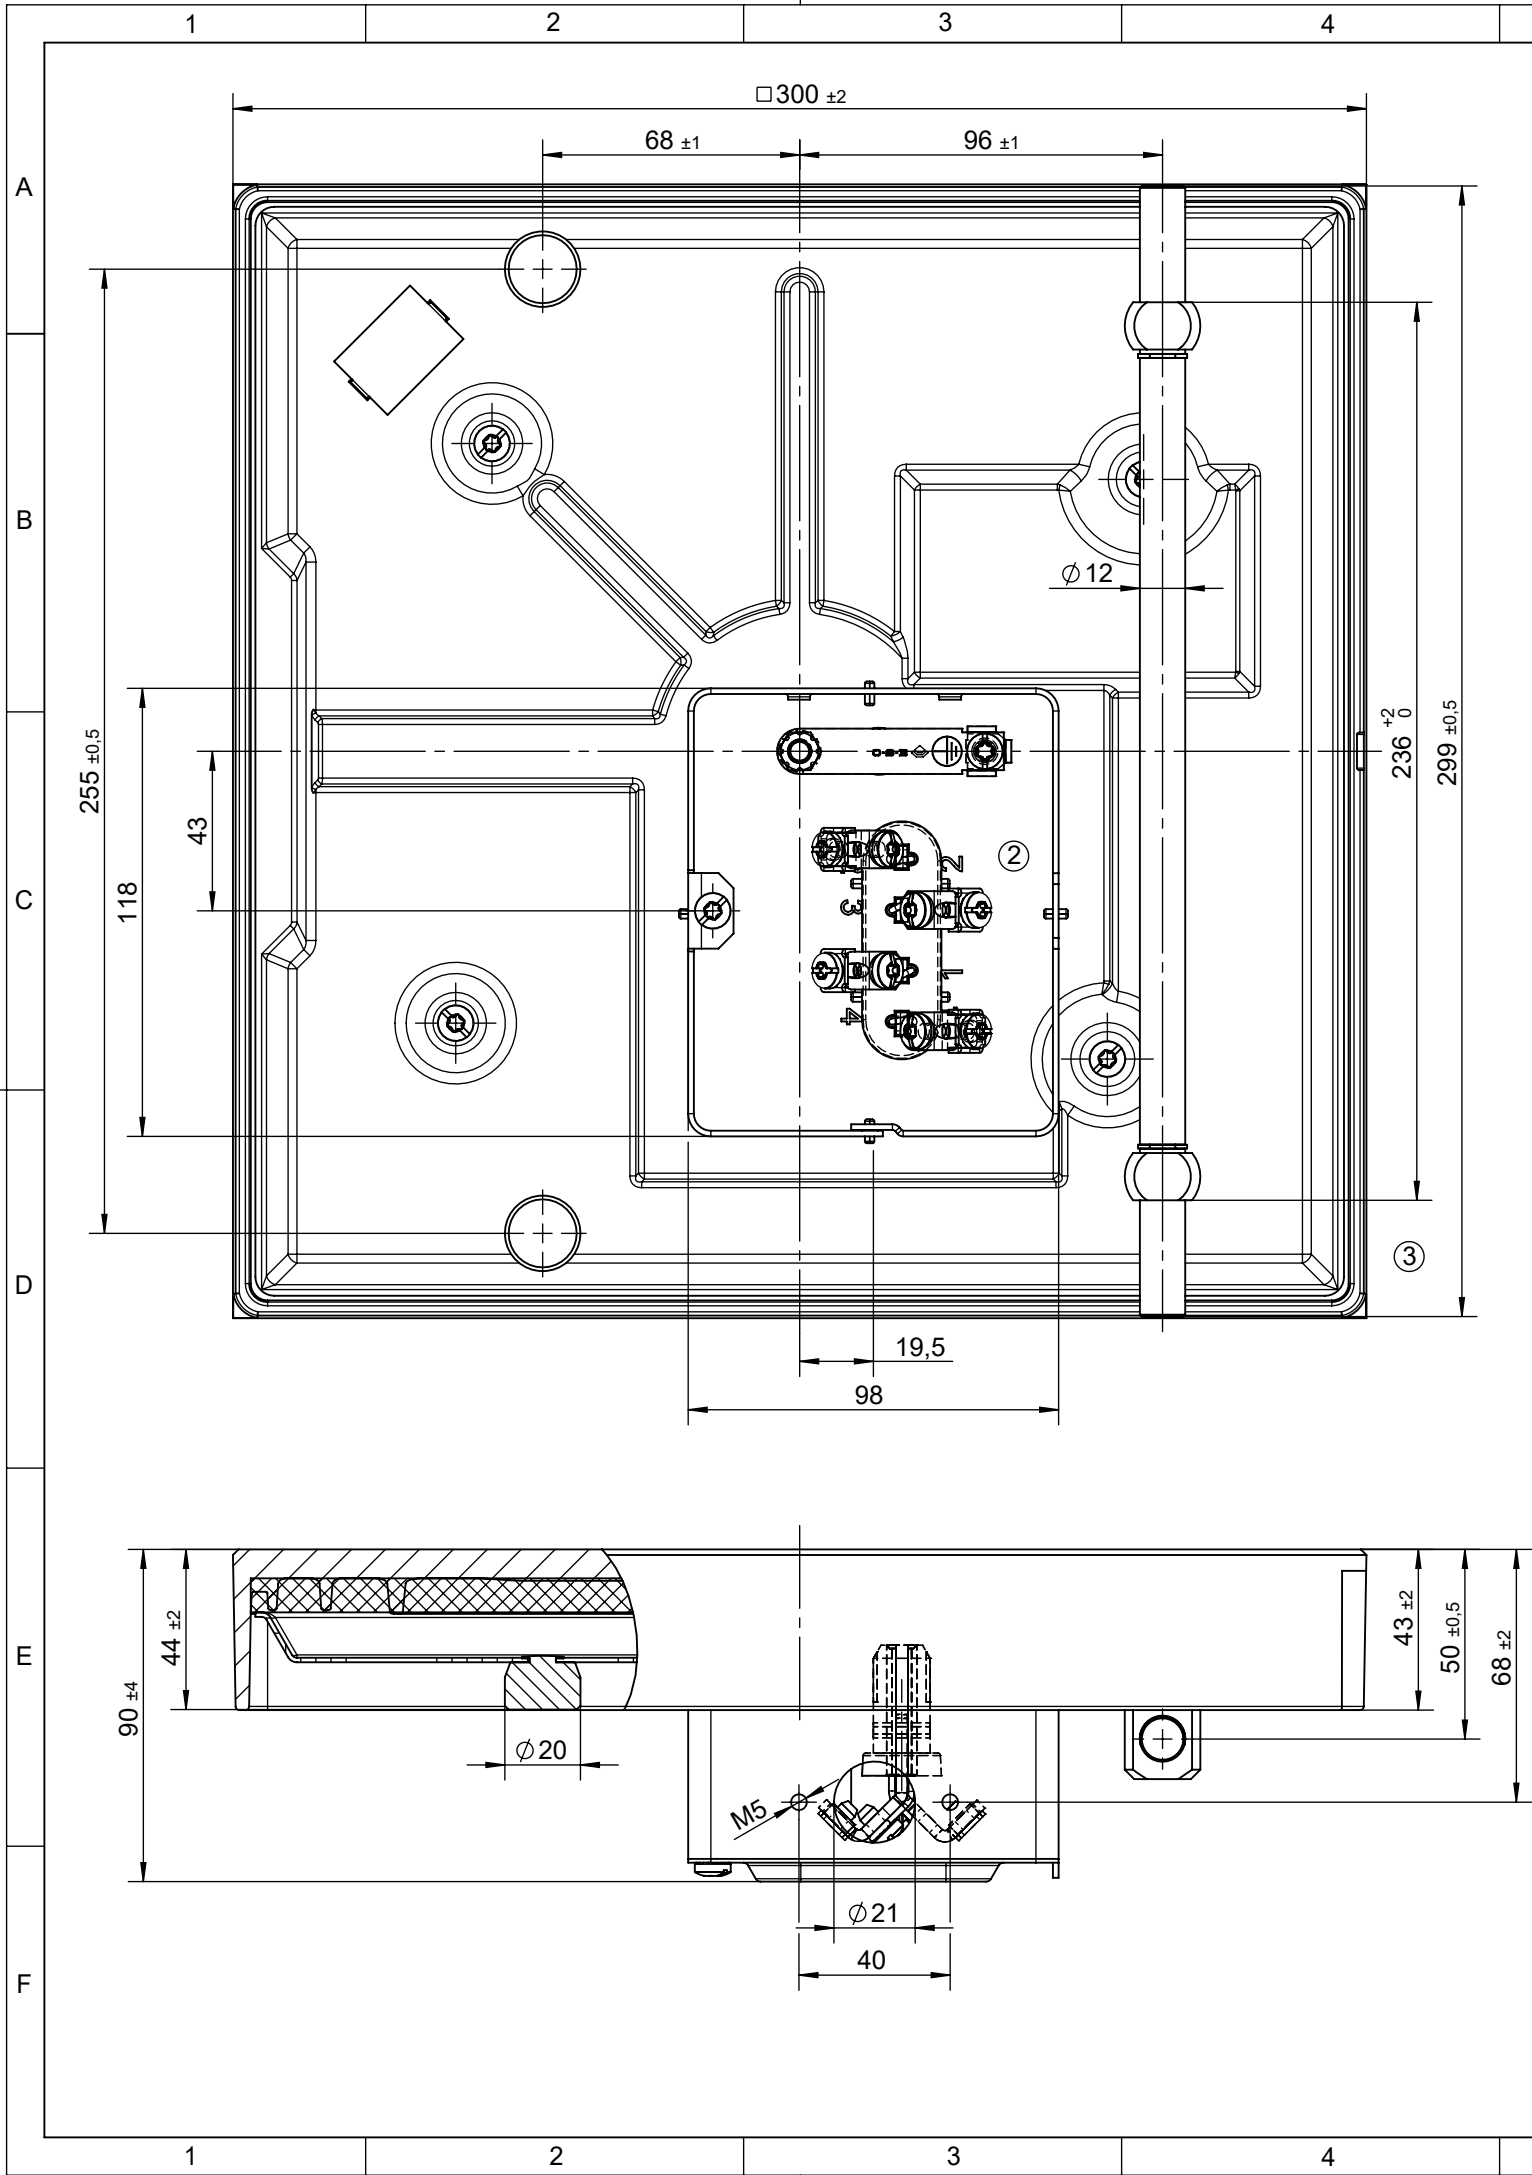


voltage marking
230 V without
240 V blue
400 V red
other green

connection
4 straps with clamp
bracket and screws M5

earthing
with connecting lug
clamp bracket and
screw M5

At higher temperature the
protector switches back to
the rest wattages.
Rest wattage by:
2500 W = 1875 W
4000 W = 2000 W

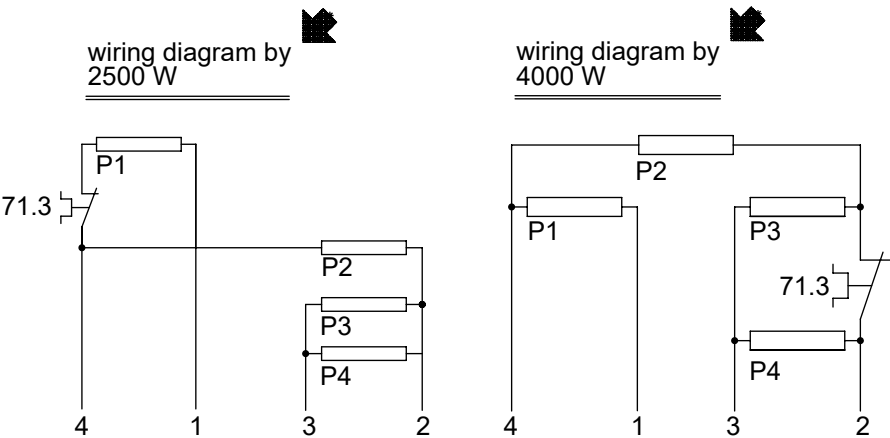

8	11.33460.349	2500	400	625	625	625	625	2500	1875	1250	625	420	250	X					
7	11.33460.348	2500	480	625	625	625	625	2500	1875	1250	625	420	250						
6	11.33460.346	4000	415	1500	1000	1000	500	4000	2500	1500	1000	600	430	X					
5	11.33460.345	4000	480	1500	1000	1000	500	4000	2500	1500	1000	600	430						
4	11.33460.344	4000	440	1500	1000	1000	500	4000	2500	1500	1000	600	430	X					
3	11.33460.343	2500	440	625	625	625	625	2500	1875	1250	625	420	250	X					
2	11.33460.342	4000	230	1500	1000	1000	500	4000	2500	1500	1000	600	430	X					
1	11.33460.341	4000	400	1500	1000	1000	500	4000	2500	1500	1000	600	430	X					
①		W	V	P1	P2	P3	P4	6	5	4	3	2	1						
Pos	Type	Wattage	Voltage	Rated conductor				Switch positions						Appro.					
				This document is exclusively committed to you for the agreed purpose. Any kind of duplication, utilization or communication of its content is prohibited, if not expressly conceded otherwise. Violators are committed to pay compensations. Any claims of existing or future property rights remain unaffected.				Blank No.						EN Mat.No.			Scale Unit		
								Material									mm		
								Surface Texture ISO 1302									Scale		
								General Tolerances									1:2		
																			
3	A02011	2020-01-07						EGO Com. Hotplate 300x300											
2	A01938	2019-07-01	CAD	Date	Name		Designation												
1	A01597	2017-11-22	Creat.	2019-12-16	MAKUCJ														
Cha.	Information No.	Date	Proc.	2019-12-17	MAKUCJ														
F.Rel.	A01454	2012-08-09	Rel.	2019-12-18	KOVACICB														
								document id.						Stat.	Sheets	Doc.	Ex.Doc.		
								11.33460.34X-101-03-A						F					
Origin			Repl.for 11.33460.3XX				Repl.by				Ref.								
5			6				7				8								